



SPECIFICATION NOTES


1. SUBGRADE AND PROFILE GRADE SHALL BE OUTSLOPED 4% TO 6 % UNLESS OTHERWISE SHOWN ON THE DRAWINGS OR STAKED ON THE GROUND AND SHALL ROTATE ABOUT CENTERLINE.
2. SUBGRADE AND PROFILE GRADE SHALL BE INSLOPED AT 4% TO 6% WHEN SHOWN ON THE DRAWINGS AND SHALL ROTATE ABOUT CENTERLINE.
3. ON SECTIONS REQUIRING THE INSTALLATION OF A DRAINAGE STRUCTURE, CLEARING SHALL BE 3 FEET PAST THE INLET AND THE OULET OF THE STRUCTURE.
4. ON SECTIONS REQUIRING CONTROLLED COMPACTION, CLEARING OF VEGETATION SHALL BE AT THE FILL CATCH POINT.
5. TYPE AND COMPACTION METHOD FOR AGGREGATE SURFACING MATERIAL WILL BE SPECIFIED IN STANDARD SPECIFICATION 304 AGGREGATE BASE AND SURFACE COARSE. DEPTH SHALL BE 6 INCHES.

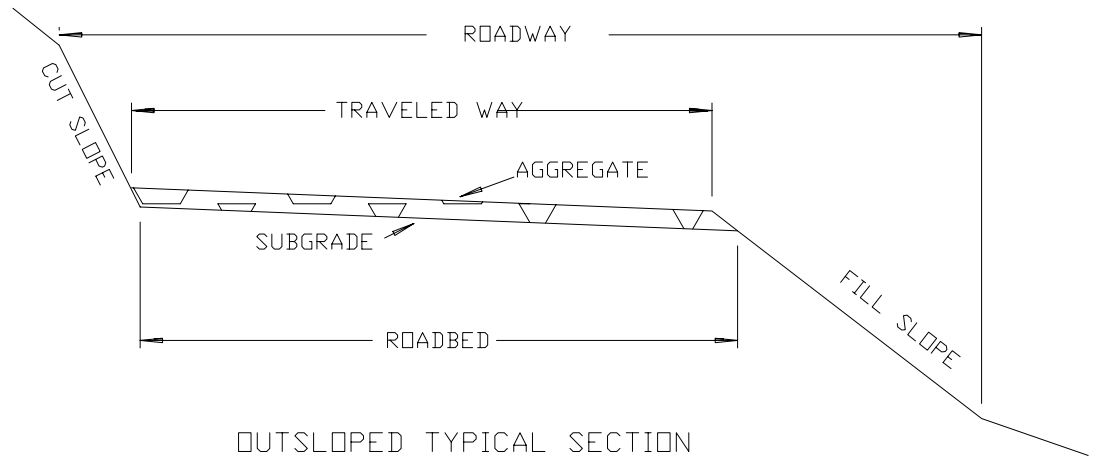

OUTSLOPED TYPICAL SECTION
NOT TO SCALE

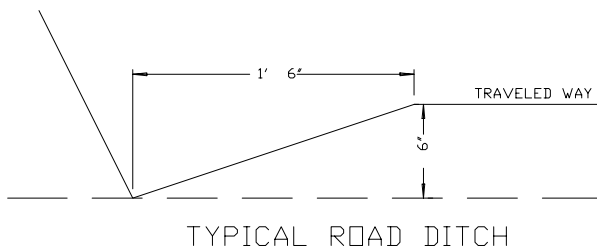

TYPICAL ROAD DITCH

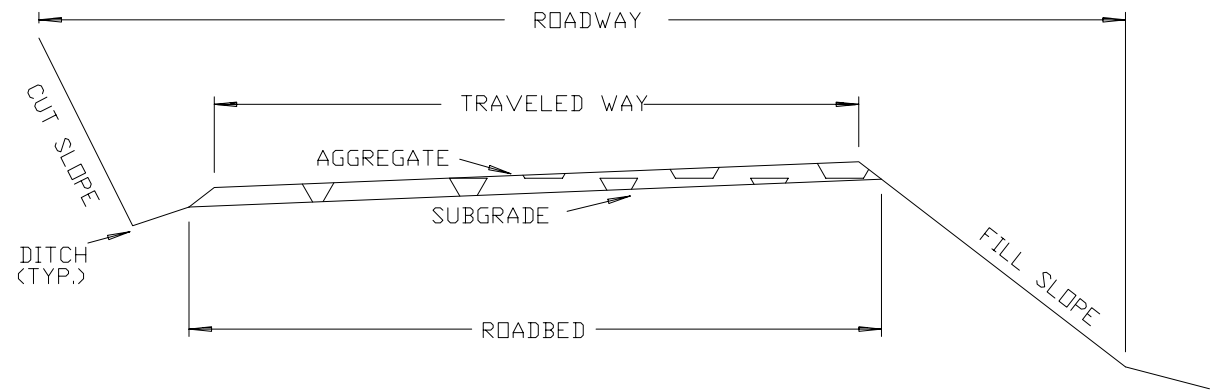

INSLOPED TYPICAL SECTION
NOT TO SCALE

TYPICAL ROAD SECTION

DATE: 2/14/98